




Specifications

OT 7-6		
Nominal Voltage	6V	
Rated Capacity (20 hours rate)	7Ah	
Dimension (± 2 mm)	Total Height (with terminals)	100mm
	Length	151mm
	Width	35mm
	Height	94mm
Weight (Approx)	1.23Kg	


Characteristics

Capacity (25°C)	20 hours rate (0.35A)	7.0Ah
Discharge Current Testing (25°C)	20 I ₂₀ rate (7A, 27min)	36min
	60 I ₂₀ rate (210A, 7min)	8.5min
Internal Resistance	Full Charged Battery 25°C	11mΩ
Capacity Affected By Temperature (20 hours rate)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	62%
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%
	Capacity After 6 Months Storage	82%
	Capacity After 12 Months Storage	64%
Cycle (Above 300 Time)	Discharge 2hrs at 1.75A Current Charge 6hrs at 0.7A Current (25°C)	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 2.1A; Voltage 7.25~7.45V
	Float (25°C)	Charge Voltage 6.8~6.9V

★ The above are average and date obtained from the first 3 charge/discharge cycles. These are not minimum values.

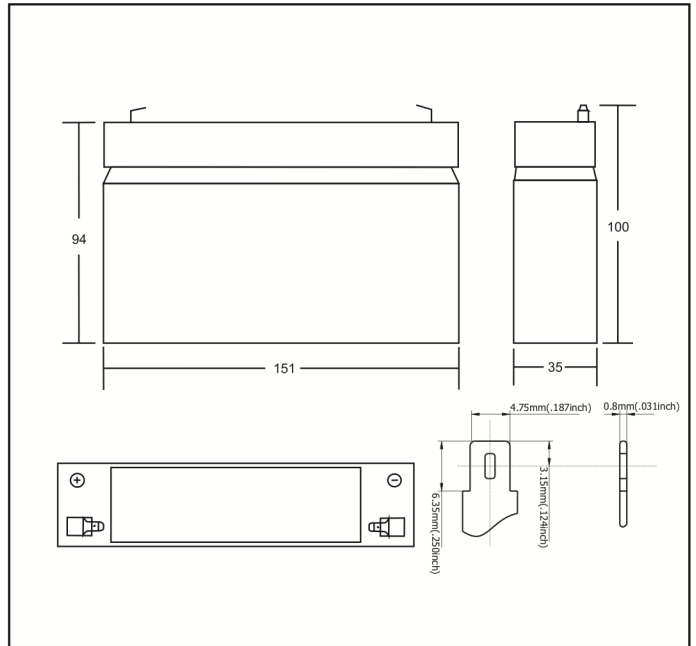

Discharge Current & Duration Time

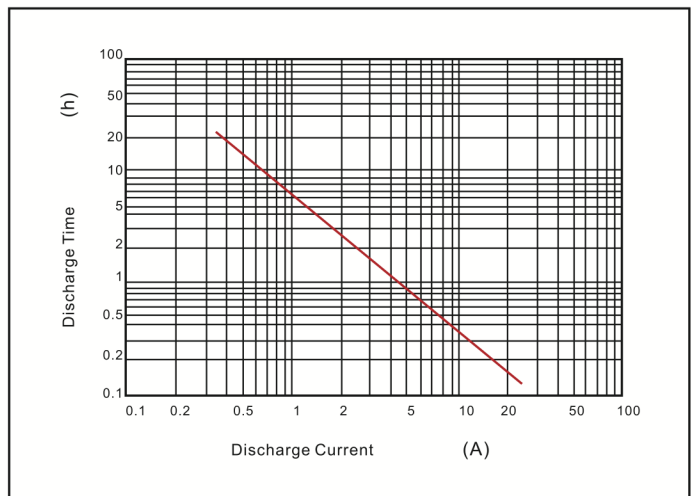

Discharge Current 25°C

