

#### Key Features

- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Child-Safe Markings & Retail Packaging
- Wide operating temperature range (- 20°C / + 60°C)
- Low self-discharge with long operating life (<1% after 1 year of storage at + 20 °C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
  - Safety: IEC 60086-4
  - Transport: UN 38.3
  - REACH compliance
  - Quality: ISO 9001, Duracell World Class Continuous Program

#### Electrical characteristics

▪ Nominal capacity (15k Ohm Cont., 2.0 V cut-off)	85 mAh
▪ Nominal voltage (at + 20 °C)	3.0 V
▪ Standard Continuous Discharge Current	0.1 mA
▪ Maximum Continuous Discharge Current	6 mA
▪ Maximum Pulse Discharge Current at 1 sec	20 mA
▪ Nominal Energy	255 mWh
▪ AC Impedance @ 1kHz	8.5 Ohm

#### Physical characteristics

▪ Typical weight	1.75g (.061 oz.)
▪ Li metal content	approx. 0.024 g

**DURACELL®**  
BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
www.duracell.com




Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

#### Typical applications

- Medical devices
- Security devices
- Fitness devices
- Watches
- Wireless sensors
- Toys
- Key-Fobs
- Bluetooth Trackers

#### Operating conditions

- Operating temperature range -20°C to 60°C  
(-4°F to 140°F)
- Storage temperatures Recommended 5°C to 30°C  
(41°F to 86°F)

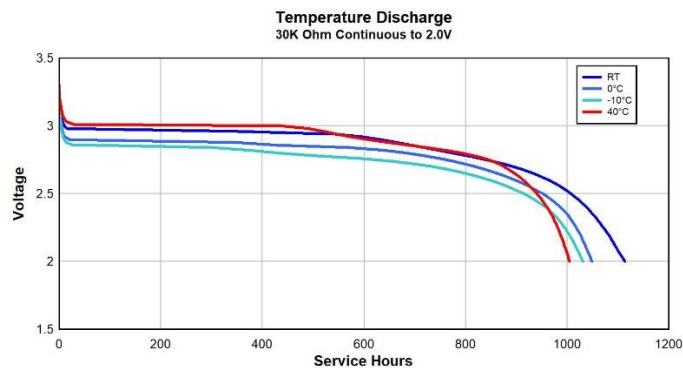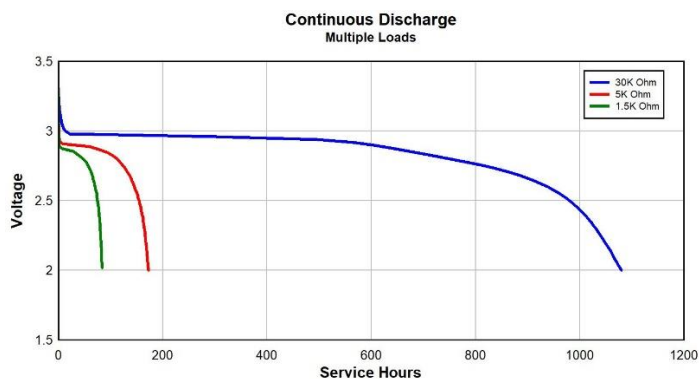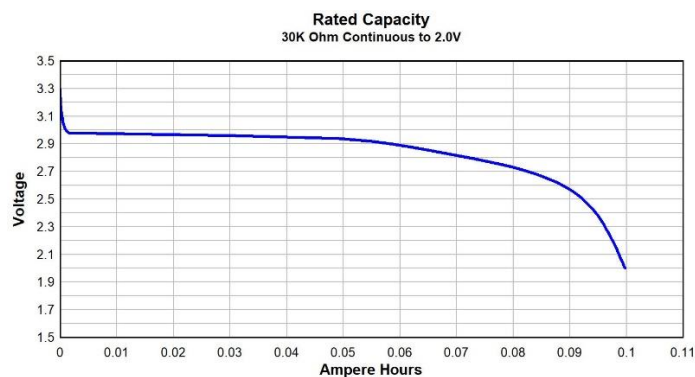

60086-4 © IEC:2007 Edition 3.0

#### Warning

Test	Test designation	Observation
A	Altitude	Pass
B	Thermal cycling	Pass
C	Vibration	Pass
D	Shock	Pass
E	External short circuit	Pass
F	Impact	Pass
G	Crush	Pass
H	Forced discharge	Pass
I	Abnormal charging	Pass
J	Free fall	Pass
K	Thermal Abuse	Pass

Fire, explosion and burn hazard

Do not recharge, short circuit, crush, disassemble, heat above 100 °C (212 °F), incinerate, or expose contents to water

#### Warning! Keep batteries away from children!

Always keep your batteries away from children to prevent swallowing. If ingestion does occur, however, be aware that initial symptoms may be similar to other childhood illnesses such as coughing, drooling and discomfort.

Battery ingestion hotline (1-800-498-8666)

#### Cavity Contact Design Recommendation

Duracell implemented on-cell Child Secure Technology to protect against accidental lithium coin battery ingestion. Non-toxic, bitter coating on the battery that is designed to compel those who put battery in their mouth to immediately spit the battery out.

Duracell recommends device designers and manufacturers avoid placing contacts within 3.2 mm of the perimeter of the negative terminal as shown in Figure 1.

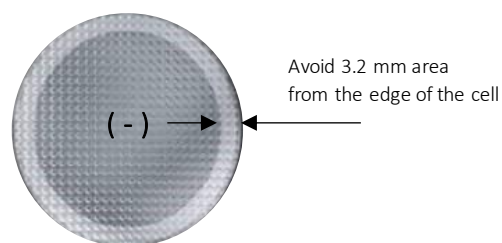


Figure 1

#### Storage

The storage area should be clean, cool (preferably not exceeding +30 °C), dry and ventilated

**DURACELL®**  
BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)