




■ Specifications

<b>OT26-12(W)</b>		
Nominal Voltage		12V
Rated Capacity (20 hours rate)		26Ah
Dimension (±2mm)	Total Height (with terminals)	125mm
	Length	175mm
	Width	165mm
Weight (Approx)		8.05Kg


■ Characteristics

Capacity		20 hours rate (1.3A)	26Ah
Discharge Current Testing (25°C)		20 I <sub>20</sub> rate 1 (26A, 27min) 60 I <sub>20</sub> rate 3 (78A, 7min)	34min 8min
Internal Resistance		Full Charged Battery 25°C	10mΩ
Capacity Affected By Temperature (20 hours rate)		40°C 25°C 0°C -15°C	102% 100% 85% 62%
Residual Capacity (25°C)		Capacity After 3 Months Storage Capacity After 6 Months Storage Capacity After 12 Months Storage	91% 82% 64%
Cycle (Above 300 Time)		Discharge 2hrs at 6.5A Current Charge 6hrs at 2.6A Current (25°C)	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 7.8A; Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	

★ The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

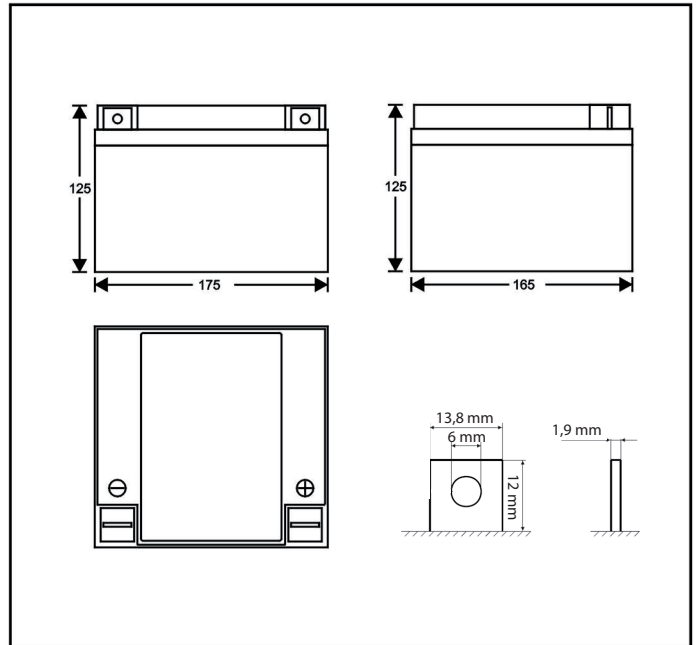

■ Discharge Current & Duration Time

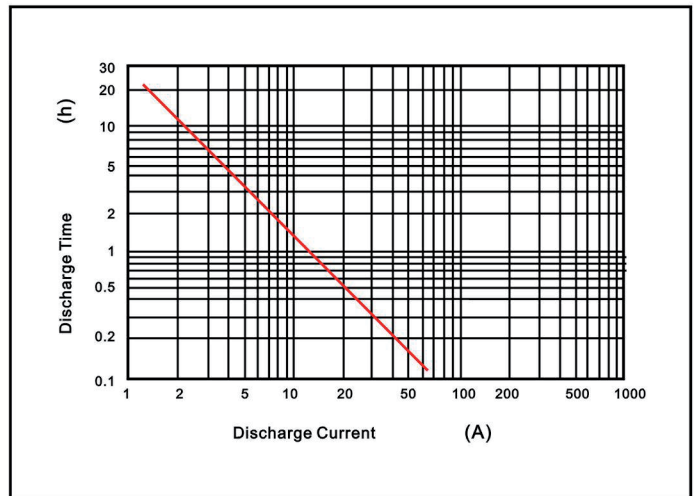

■ Discharge Current 25°C

