

EL[®]MARK

The Brand of Electricity

LED FLOODLIGHT

HELIOS SMD WHITE



GENERAL INFORMATION »

- ∴ Rated voltage: 176-264V/ 50-60Hz
- ∴ Power: 10W; 20W; 30W; 50W; 100W;
- ∴ LED driver: mounting in the body
- ∴ Colour temperature: 4000K
- ∴ LED source: Epistar SMD2835
- ∴ Colour: White
- ∴ Body: Aluminium casting
- ∴ Beam angle: 120°
- ∴ Colour rendering index: Ra> 70
- ∴ Average lifetime: 15 000h
- ∴ Ambient temperature: -20°C÷ +55°C
- ∴ Protection against dust and moisture: IP65

FEATURES »

- ∴ Efficient replacement of traditional halogen and metal-halide floodlights
- ∴ Wide distribution of even and stable light
- ∴ Economic - low power consumption
- ∴ Repeated switch on/off does not affect the fixture lifespan
- ∴ Instant light at maximum luminous flux
- ∴ Environmentally friendly - no mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration stable body
- ∴ Voltage supply fluctuations do not affect the normal operation of the floodlights

TECHNICAL SPECIFICATION SHEET


APPLICATION »

- ∴ Sports halls
- ∴ Commercial areas
- ∴ Warehouses
- ∴ Production facilities
- ∴ Squares
- ∴ Parking lots

PRODUCT DETAILS »

Catalogue number	Watt (W)	Whole fixture lumens (lm)	Colour temp (K)	Colour body
98HELIOS10/WH	10	800	4000	white
98HELIOS20/WH	20	1600	4000	white
98HELIOS30/WH	30	2400	4000	white
98HELIOS50/WH	50	4000	4000	white
98HELIOS100/WH	100	8000	4000	white

DIMENSIONS »

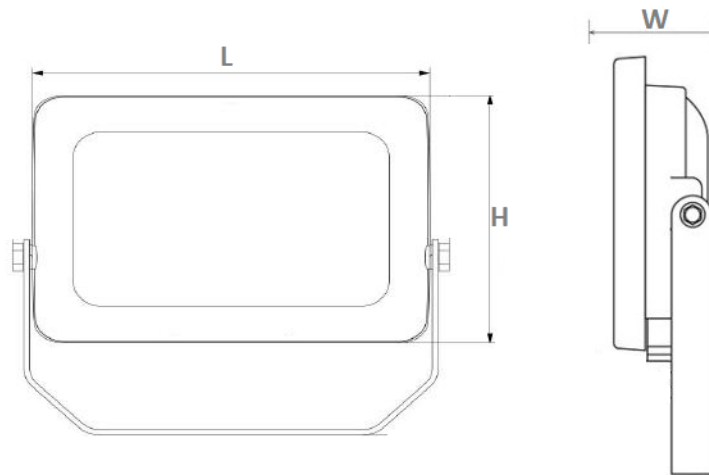

Model	Length (mm)	Width (mm)	Height (mm)
98HELIOS10/WH	105	25	85
98HELIOS20/WH	128	25	88
98HELIOS30/WH	153	25	111
98HELIOS50/WH	205	30	160
98HELIOS100/WH	300	30	205