

# ADLS-240 series

240W Enclosed Type Switching Power Supply



## ■ Features:

- Constant voltage design
- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage /Over Temperature
- Cooling by free air convection
- Compact size
- Low price



5 9 0 2 1 3 5 1 1 9 4 4 0



SELV  
equivalent

## ELECTRICAL SPECIFICATION

MODEL	ADLS-240-12
<b>OUTPUT</b>	
Rated Voltage	12V
Rated Current	20A
Rated Power	240W
Voltage Adjustment – potentiometer VR1	11.4 ÷ 13.2V
Line Regulation	± 1%
Load Regulation	± 2%
Tolerance [3]	± 5%
Ripple & Noise (max.) [2]	1V <sub>p-p</sub>
Setup, Rise Time [4]	500ms, 30ms / 230VAC at full load
Hold up Time	20ms / 230VAC at full load
<b>INPUT</b>	
Voltage Range	180 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Efficiency (typ.)	85%
AC Current (typ.)	2.5A / 230VAC
<b>PROTECTIONS</b>	
Overload	Range: 110 ÷ 170% rated current
	Type: fold forward mode(voltage rises, current drops), auto-recovery
Over voltage	13.5 ÷ 20.5V
	Type: hiccup mode, auto-recovery.
Over Temperature	Range: 110°C ± 10°C (detect by main IC)
	Type: shut-off, auto-recovery.

# ADLS-240 series

240W Enclosed Type Switching Power Supply



## WORKING ENVIRONMENT

<b>Working Temperature</b>	-20°C ÷ 50°C
<b>Working Humidity</b>	20 ÷ 90% RH non-condensing
<b>Storage Temperature and Humidity</b>	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing

## SAFETY AND EMC REGULATIONS


<b>Safety Standards</b>	Compliance to EN61347-1, EN61347-2-13
<b>Withstand Voltage</b>	I-P/O-P: 1.5kVAC; I-P/GND: 1.5kVAC; O-P/GND: 0.5kVAC
<b>EMC Emission</b>	Compliance to EN55015
<b>EMC Immunity</b>	Compliance to EN61547
<b>Harmonic Current</b>	Compliance to EN61000-3-3; EN61000-3-2

## OTHERS

<b>Dimensions</b>	223 x 71.5 x 36mm (L x W x H)
<b>Weight and Packing</b>	0.54kg; 40pcs./ctn; ctn weight and dimensions: 24.5kg; 46 x 39.3 x 27cm

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

## MECHANICAL SPECIFICATION

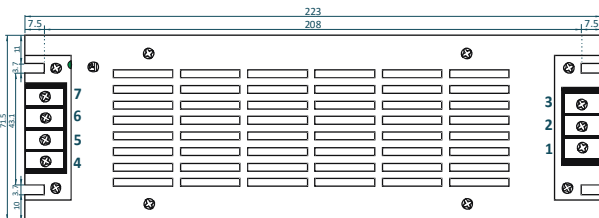

## TERMINAL PIN NO. ASSIGNMENT

PIN No.	Assignment	PIN No.	Assignment
1	Frame Ground: GND	4,6	Output: -V
2	Input: AC/L	7,8	Output: +V
3	Input: AC/N	VR1	Output voltage adjustment
		LED1	Power On indicator