

# ADLS-60 series

60W Enclosed Type Switching Power Supply



## ■ Features:

- Constant voltage design
- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over Temperature
- Cooling by free air convection
- Slim case size
- Low price



519 0213511 193891



CE SELV equivalent

## ELECTRICAL SPECIFICATION

MODEL	ADLS-60-12
<b>OUTPUT</b>	
Rated Voltage	12V
Rated Current	5A
Rated Power	60W
Voltage Adjustment – potentiometer VIP1	10.8 ÷ 13.2V
Line Regulation	± 1%
Load Regulation	± 2%
Tolerance [3]	± 5%
Ripple & Noise (max.) [2]	320mV <sub>p-p</sub>
Setup, Rise Time [4]	500ms, 30ms / 230VAC at full load
Hold up Time	30ms / 230VAC at full load
<b>INPUT</b>	
Voltage Range	100 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Efficiency (typ.)	80%
AC Current (typ.)	1.2A / 115VAC, 0.55A / 230VAC
<b>PROTECTIONS</b>	
Overload	Range: 105 ÷ 150% rated current
	Type: hiccup mode, auto-recovery.
Short Circuit	Type: hiccup mode, auto-recovery.
Over voltage	13.5 ÷ 18.5V
	Type: hiccup mode, auto-recovery.
Over Temperature	Range: 110°C ± 10°C (detect by main IC)
	Type: hiccup mode, auto-recovery.

# ADLS-60 series

60W Enclosed Type Switching Power Supply



## WORKING ENVIRONMENT

<b>Working Temperature</b>	-20°C ÷ 50°C
<b>Working Humidity</b>	20 ÷ 90% RH non-condensing
<b>Storage Temperature and Humidity</b>	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing

## SAFETY AND EMC REGULATIONS



<b>Safety Standards</b>	Compliance to EN61347-1, EN61347-2-13, IP67
<b>Withstand Voltage</b>	I-P/O-P: 1.5kVAC; I-P/GND: 1.5kVAC; O-P/GND: 0.5kVAC
<b>EMC Emission</b>	Compliance to EN55015
<b>EMC Immunity</b>	Compliance to EN61547
<b>Harmonic Current</b>	Compliance to EN61000-3-3; EN61000-3-2

## OTHERS

<b>Dimensions</b>	160 x 41 x 32mm (L x W x H)
<b>Weight and Packing</b>	0.18kg; 100pcs./ctn; ctn weight and dimensions: 21kg; 46 x 39.3 x 27cm

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

## MECHANICAL SPECIFICATION

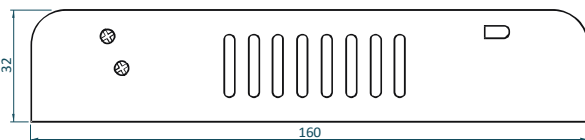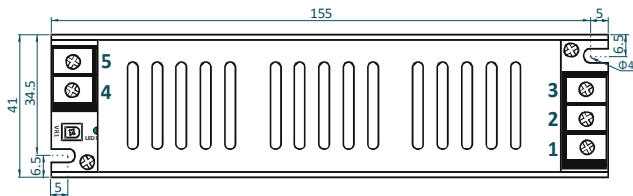

## TERMINAL PIN NO. ASSIGNMENT

PIN No.	Assignment	PIN No.	Assignment
1	Frame Ground: GND	4	Output: +V
2	Input: AC/N	5	Output: -V
3	Input: AC/L	VR1	Output voltage adjustment
		LED1	Power On indicator